


Specifications – PILA Horti Driver 600W / 400V


Product description	PILA Horti Driver 600W / 400V
Rated input Power (W) ¹	635
Rated input Voltage (V)	400
Rated input Current (A) ¹	1.6
Rated input Frequency (Hz)	50/60
Power Factor ¹	0.99
Inrush current peak (A)	30
Inrush current width (ms)	1.6
Energy Efficiency (%) ¹	96
Dimming	No
Output frequency (kHz)	110-230
Ignition voltage peak (V) ²	3200
Maximum output wire capacity (pF)	250
Connector types	JST VH Connector
Mechanical dimension (mm) (L X W x H)	181 x 151 x 58
Weight (gr)	760
Ambient temperature (°C)	0 to 30
Storage temperature (°C)	-20 to 85
Maximum case temperature (at Tc) (°C)	70
Energy Efficiency Index	A2
Surge immunity	EN61547 (L-L 2kV, L-PE 2kV)
Lifetime (h) ³	20,000
Suitable for luminaire Insulation Class	I (per IEC60598-1)
Standard compliance & certifications	CE, EAC, UA CISPR15 ed. 7.1, EN60298, EN90926, ISO 14001, IEC61000-3-2, IEC 68-2-6 Fc (10-150Hz, 2G), IEC 68-2-29 Eb (10G/16ms)
EAN	8727900965780

- 1) At rated input voltage and rated output power
- 2) Between connector and protective earth
- 3) At or below Tc max

Dimension – PILA Horti Driver 600W / 400V

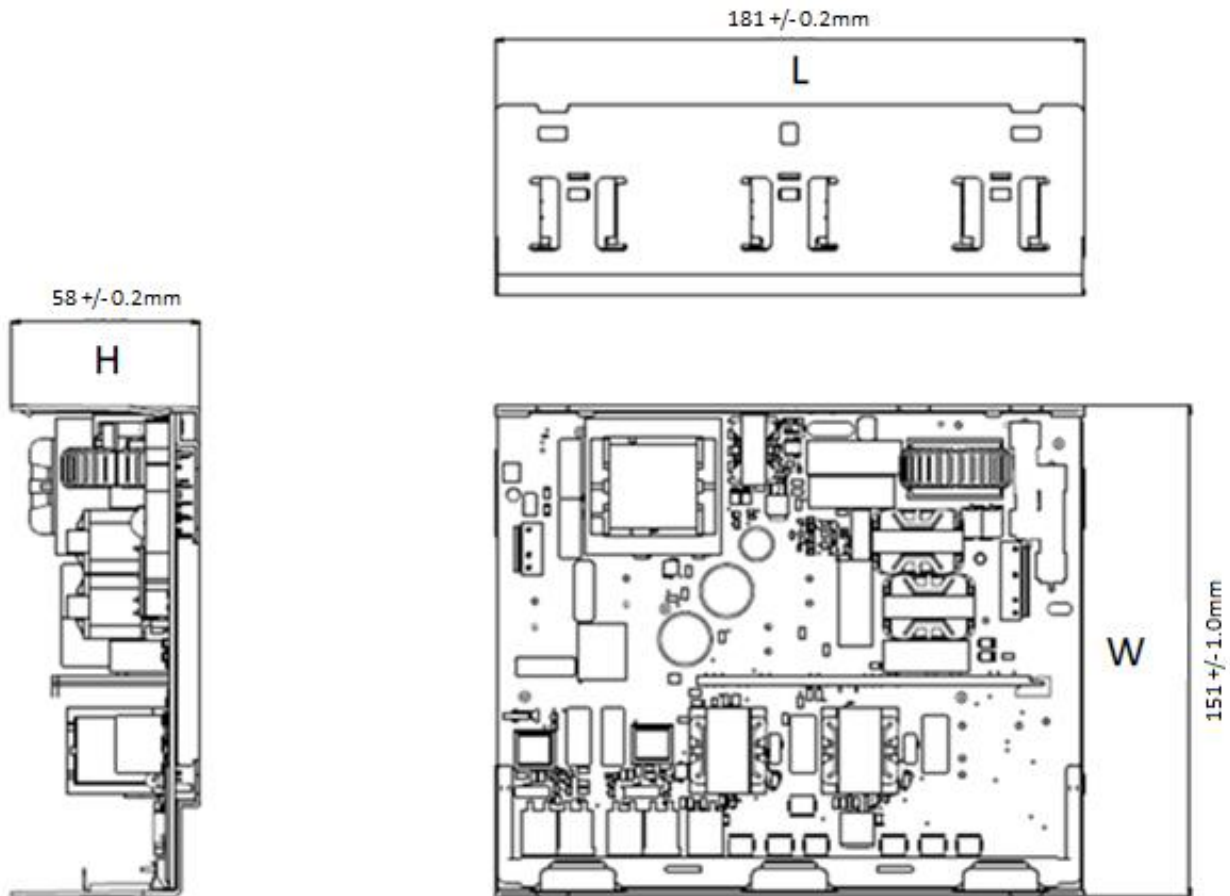

Wiring diagram – PILA Horti Driver 600W / 400V

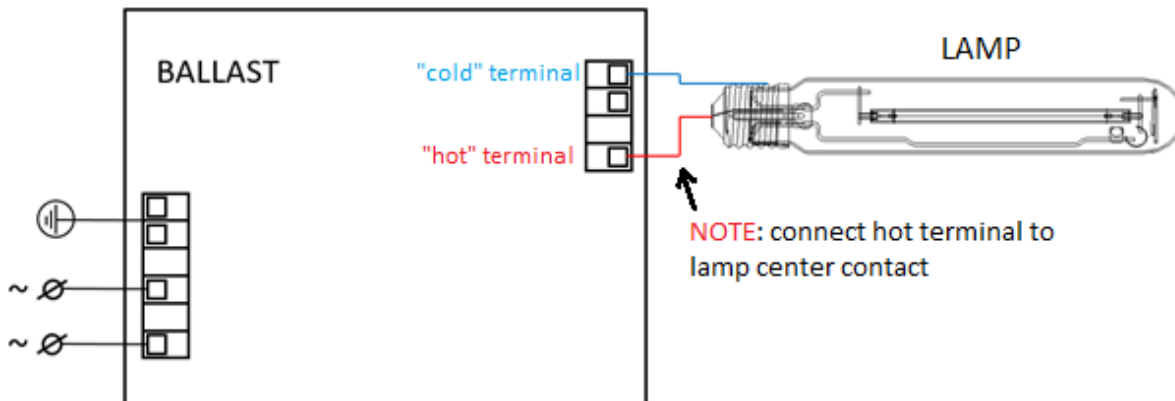

This document contains information relating to the PILA lamps portfolio, intended for companies who may be interested in developing their product offering. Note that the information provided is subject to change. PILA lamps does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract.

Date of release: April 30, 2019 V2